



733 PIPE CLEANER

LOW
VOC

GENERAL DESCRIPTION:

E-Z Weld 733 Pipe Cleaner is a special blend of fast acting solvents formulated to clean PVC, CPVC, ABS and Styrene Pipes & Fittings, it is suitable for all schedules and all diameters. This Pipe Cleaner will effectively remove oils, dirt, grease and other foreign matter prior to applying cement. It is very important that the surface of pipes and fittings are clean for a strong leak proof joint

APPLICATION:

E-Z Weld Pipe Cleaner can be used on PVC, CPVC, ABS and Styrene. Use applicator supplied with can or clean cloth to apply it, then wipe off with a clean dry cloth.

Always follow instructions on the label.

Application temperature: -10°F to 110°F

Storage temperature: -10°F to 100 °F

QUALITY ASSURANCE:

Every batch is carefully checked and monitored to assure consistently high quality standards. All ingredients are purchased from approved suppliers. This product is not regulated by NSF or IAPMO.


PHYSICAL PROPERTIES:

Color: Clear Shelf life: Unlimited (Unopened can)

Specific Gravity: 6.405

LOW VOC (VOLITILE ORGANIC COMPOUND)

Maximum VOC per SCAQMD 1168/316A: 550 g/l

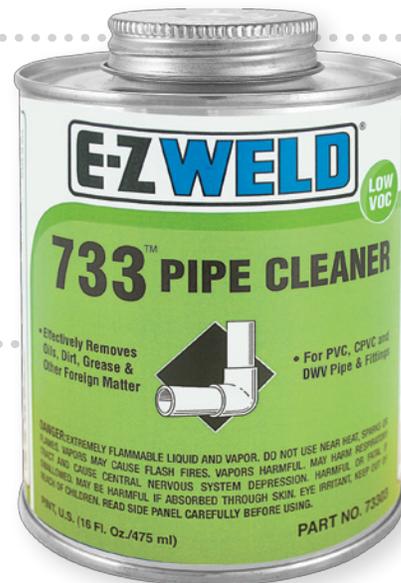



733 PIPE CLEANER



AVAILABILITY:

| Size | Part No. Regular | (UPC No.) |
|-------|------------------|-----------|
| 1/4pt | 73301 | NA |
| 1/2pt | 73302 | NA |
| Pt | 73303 | NA |
| Qt | 73304 | NA |
| Gal | 73305 | NA |

1/4 pt., 1/2 pt., Pt. And Qt. cans are supplied with dauber inside cap. Gallon sizes supplied with plain cap only.

PACKAGING:

| Size | 1/4 Pt | 1/2 Pt | Pt | Qt | Gal |
|-----------------------|--------|--------|-------|-------|-------|
| Fluid oz | 4 | 8 | 16 | 32 | 128 |
| Liters | 0.12 | 0.24 | 0.49 | 0.95 | 3.79 |
| Units per case | 24 | 24 | 12 | 12 | 6 |
| Weight per case - Lb. | 8 | 15 | 14 | 27 | 49 |
| Weight per case - Kg | 3.63 | 6.81 | 6.36 | 12.26 | 22.70 |
| Cubic feet per case | 0.28 | 0.42 | 0.43 | 0.73 | 1.12 |
| Cubic meter per case | 0.008 | 0.012 | 0.012 | 0.021 | 0.032 |
| Cases per pallet | 240 | 140 | 144 | 100 | 45 |

SAFETY PRECAUTIONS:

Ensure adequate ventilation to avoid vapor build up which may cause flash fire. Vapor build up may also cause dizziness, headaches or eye watering. If symptoms are experienced use respiratory protection (NOISH/MSHA TC 23 c or equivalent) or leave area and provide more fresh air. Avoid contact with eyes, skin and clothing by use of safety glasses and gloves. Professionals should consult ASTM Standard F 402-93 Safe Handling of Solvent Cements, Primers and Cleaners Used for Joining Thermoplastic Pipe and Fittings. Professional users should also read the Material Safety Data Sheet for the product.

Inhalation: If breathing is difficult vacate to fresh air. If breathing problems persist seek immediate medical attention.

Eyes: Flush eyes thoroughly with water for 15 minutes. Get immediate medical attention.

Internal: If swallowed give 1 or 2 glasses of water immediately, call physician, hospital or poison control immediately. **DO NOT INDUCE VOMITING.**

SHIPPING / TRANSPORTATION:

Material packaged in less than a liter size is exempted under "Limited Quantity Rules" by DOT. These packages may be shipped with the description ORM - D Consumer Commodity. Packages shipped under this description are not subject to shipping paper requirements for flammable materials.

For a liter and larger sizes (gallon and above container):

Proper shipping name: Compound Cleaning Liquid Flammable Class: 3 UN No: NA 1993 Packing group: PG II